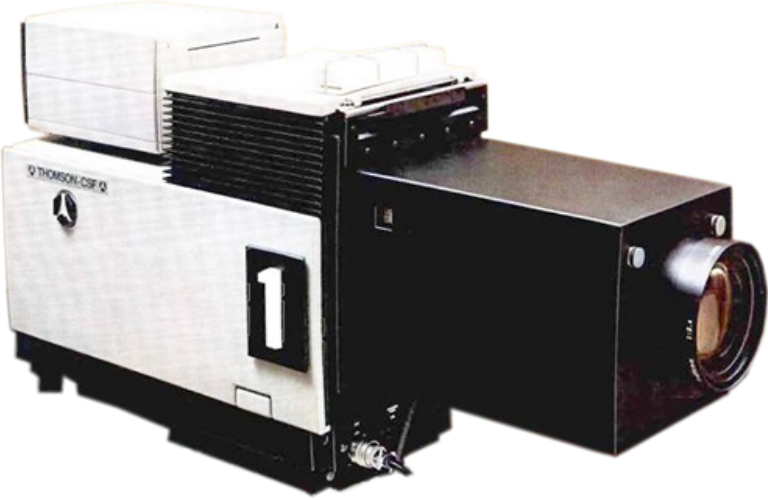


European and American Television Cameras

	Make	Thomson-CSF
	Model	TTV-1515 C, S & M
	Country	France
	Camera Type :	
	Studio colour full facilities	
Camera Description :		Studio & OB camera.

Data

Tube details	3 x Plumbicons 30mm XQ1020/5
Lens details	Choice of zoom lenses
Sig. to Noise	43dB
Sensitivity	500Lux @ f2.8
Resolution	>80% @5Mhz
Viewfinder	17cms. Tilts, swivels, elevates.
Camera cable	TriaxTV36 to 250m.
Power supply	117 to 220V. 50/60Hz. 200VA

Data

Line standards	625/50 525/60
Colour standards	R G B Y outputs external Coder
Drives or locking	Genlock
Weight *	35Kg.
Colours	
Dimensions *	300H x 280W x 490L mm.
Date introduced	Thomson revue Sep. 1971

*Excluding Lens

Associated equipment

Camera CA 1515S, CCU type CA1515S (4u high), OCP type PR1515 (2u high), Remote control panel type PT1515, PSU type AL1515, Camera cable type CC1515/F.

Features

Auto registration, internal diascope, and somewhat complex optical relay system with 3 tubes parallel to each other at the bottom of the cam

General description

C version = Multicore.

M version = Multiplex (Triax).

S version = Standard, no auto registration.

References

Product Catalogue

Photo Reference

Innovations

History

Notes

The viewfinder is supported on a gas assisted elevation post.

The 1516P version was the companion portable weighing 8Kg. and the Auxiliary pack 12Kg



CCU and controls