


European and American Television Cameras

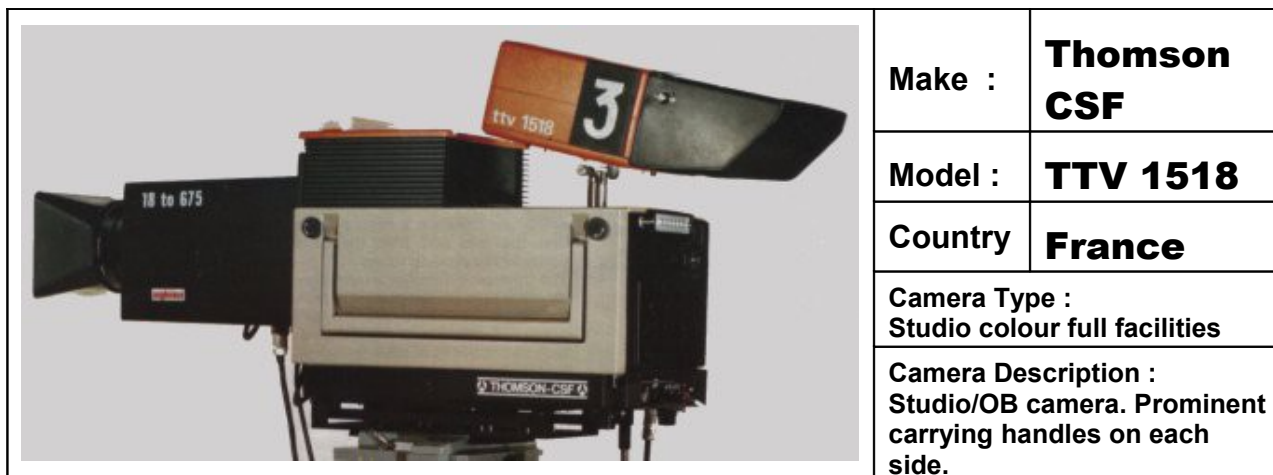

Data

Tube details 3 x Plumbicons 30mm XQ1020/5
Len details Choice of zoom lenses
Sig. to Noise 46dB rms. 300nA.
Sensitivity 1500Lux @ f4.0
Resolution >80% @5Mhz
Viewfinder 17cms. Tilts, swivels, elevates.
Camera cable Triax 1500m. Auto length comp.
Power supply 117 to 220V. 50/60Hz. 250VA

Data

Line standards 625/50 525/60
Colour standards R G B Y outputs external Coder
Drives or locking Genlock
Weight * 35Kg.
Colours
Dimensions * 440H x 280W x 530L mm.
Date designed 1979??
Dates used
Used by

*Excluding Lens & Viewfinder

Associated equipment

These are from the TTV 1515 channel which is similar. CCU type CA1515S (4u high), OCP type PR1515 (2u high), Remote control panel type PT1515, PSU type AL1515.

Features

Auto; registration, Black, White, Flare, Beam, Iris, internal diascope and a somewhat complex optical relay system with 3 tubes parallel to each other at the bottom of the camera. 130 volt supply on Triax.

Developments

References

Product Catalogue

Photo Reference

Innovations

Optional camera heating cover (130V 100W DC.)

History

Notes

The viewfinder is supported on a gas lift elevation post.